
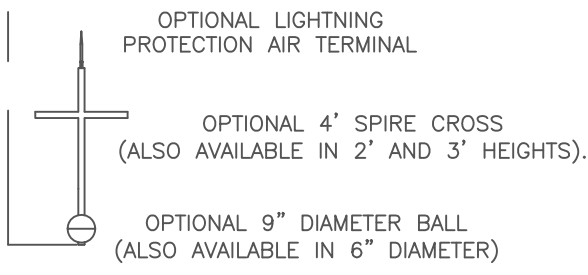


**DESIGN PARAMETERS**

The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50' above ground using ASCE 7-95 exposure category "C". An additional 2' in height was added to the base during these calculations to account for variations in roof pitch, etc.

P.O. BOX 1340  
 HENDERSON, TX 75653-1340  
 903/657-6522  
 FAX# 903/657-2318

FIBERGLASS  
 SPECIALTIES  
 INCORPORATED

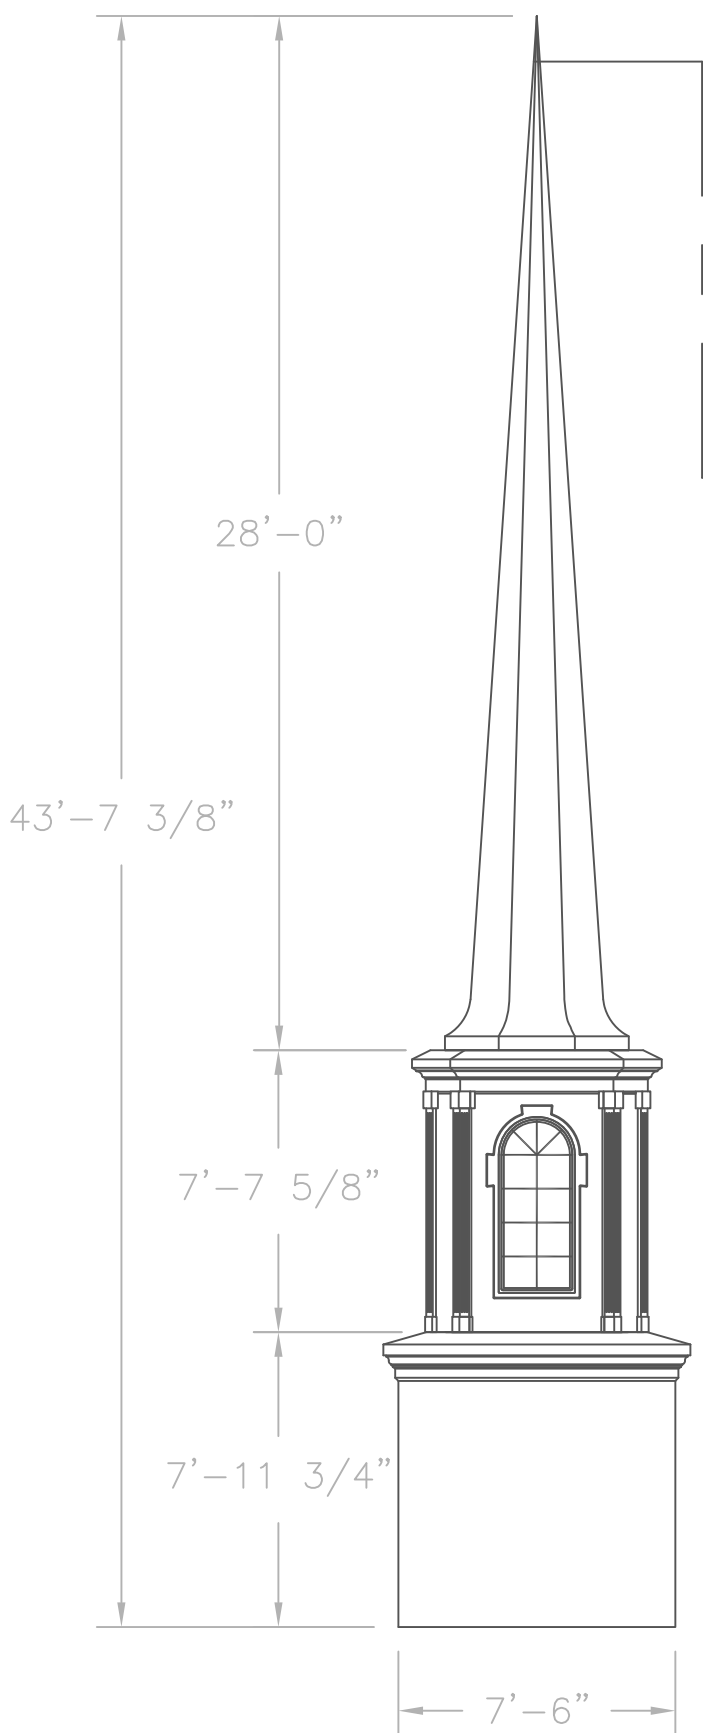

SPIRE UNIT #728

CUPOLA UNIT #608C  
 WITH KRINKLGLAS WINDOWS  
 (ALSO AVAILABLE WITH VENTED LOUVERS)

BASE CUPOLA UNIT #703

① ELEVATION  
 E1

Project: STEEPLE UNIT #19

Date: 06-26-00  
 Revisions 02-07-06 AGT  
 Scale: 3/16" = 1'

Drawing By: RLB  
 Checked By: ALL-STL  
 File # ST19F  
 DWG #

Sheet #  
 E1F  
 ELEVATION

THESE DRAWINGS ARE THE PROPERTY OF FIBERGLASS SPECIALTIES INC. DIMENSIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL CUPOLA AND STEEPLE UNITS ARE FABRICATED USING MINIMAL STANDING SEAMS UNLESS OTHERWISE NOTED. ALL CUPOLA AND STEEPLE UNITS ARE DESIGNED TO BE ERECTED ON A COMPLETED ROOFING SYSTEM AND ARE NOT GUARANTEED TO BE LEAK PROOF.