

DESIGN PARAMETERS

The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50' above ground using ASCE 7-95 exposure category "C".

P.O. BOX 1340
HENDERSON, TX 75653-1340
903/657-6522
FAX# 903/657-2318

FIBERGLASS
SPECIALTIES
INCORPORATED




OPTIONAL LIGHTNING
PACKAGE AIR TERMINAL

OPTIONAL 4' SPIRE CROSS
(ALSO AVAILABLE IN 2' AND 3' HEIGHTS).

OPTIONAL 9" DIAMETER BALL
(ALSO AVAILABLE IN 6" DIAMETER)

ALL UNITS WERE ENGINEERED WITH A 4' CROSS
AND 9"Ø BALL INSTALLED PER FIBERGLASS
SPECIALTIES, INC. STANDARD MOUNTING PROCEDURES.

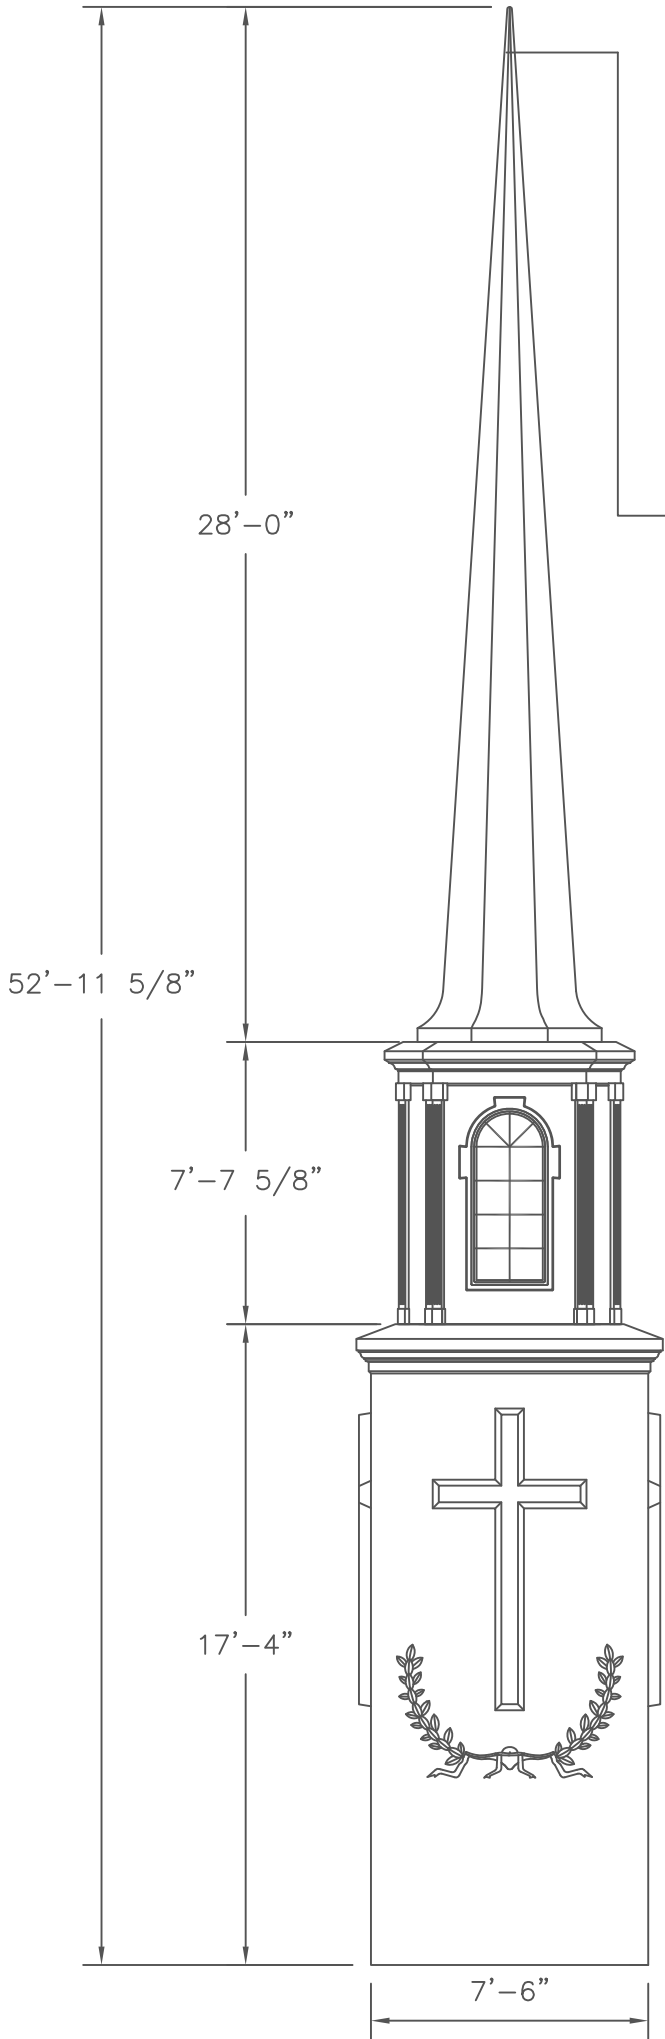

SPIRE UNIT #728

CUPOLA UNIT #608C
WITH KRINKLGLAS WINDOWS
(ALSO AVAILABLE WITH VENTED LOUVERS)

CUPOLA UNIT #409
(ALSO AVAILABLE WITHOUT WREATH)

THESE DRAWINGS ARE THE PROPERTY OF
FIBERGLASS SPECIALTIES INC. DIMENSIONS
AND DETAILS ARE SUBJECT TO CHANGE
WITHOUT NOTICE. ALL CUPOLA AND STEEPLE
UNITS ARE FABRICATED USING MINIMAL
STANDING SEAMS UNLESS OTHERWISE NOTED.
ALL CUPOLA AND STEEPLE UNITS ARE DE-
SIGNATED TO BE ERCTED ON A COMPLETED
ROOFING SYSTEM AND ARE NOT GUAR-
ANTEED TO BE LEAK PROOF.

Project:

STEEPLE UNIT #35

Date: 05-17-04

Revisions

Scale: 3/16" = 1'

Drawing By: THE

Checked By:

File # ALL-STL\

DWG # ST35F

Sheet#

E1F

ELEVATION